

FIG. 6

ULTIMATE WING LOADS
SUB-SONIC CONDITION
85000 *G.W. @ 2.5g

Job #89B00980R
Box #4 Folder 59

16 80
14 70
12 60
10 50
8 40
6 30
4 20
2 10
0 0

My ~ 10,000 x 10
Mx ~ 10,000 x 10
Sz ~ 1000 LBS.

My P.B.C.

Mx

Sz

WING STATION ~ IN

PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION
CALIFORNIA DIVISION


PAGE 14-20
MODEL A-11
REPORT NO. _____

WING

FIG. 7

AIRFOIL

SECTION PROPERTIES

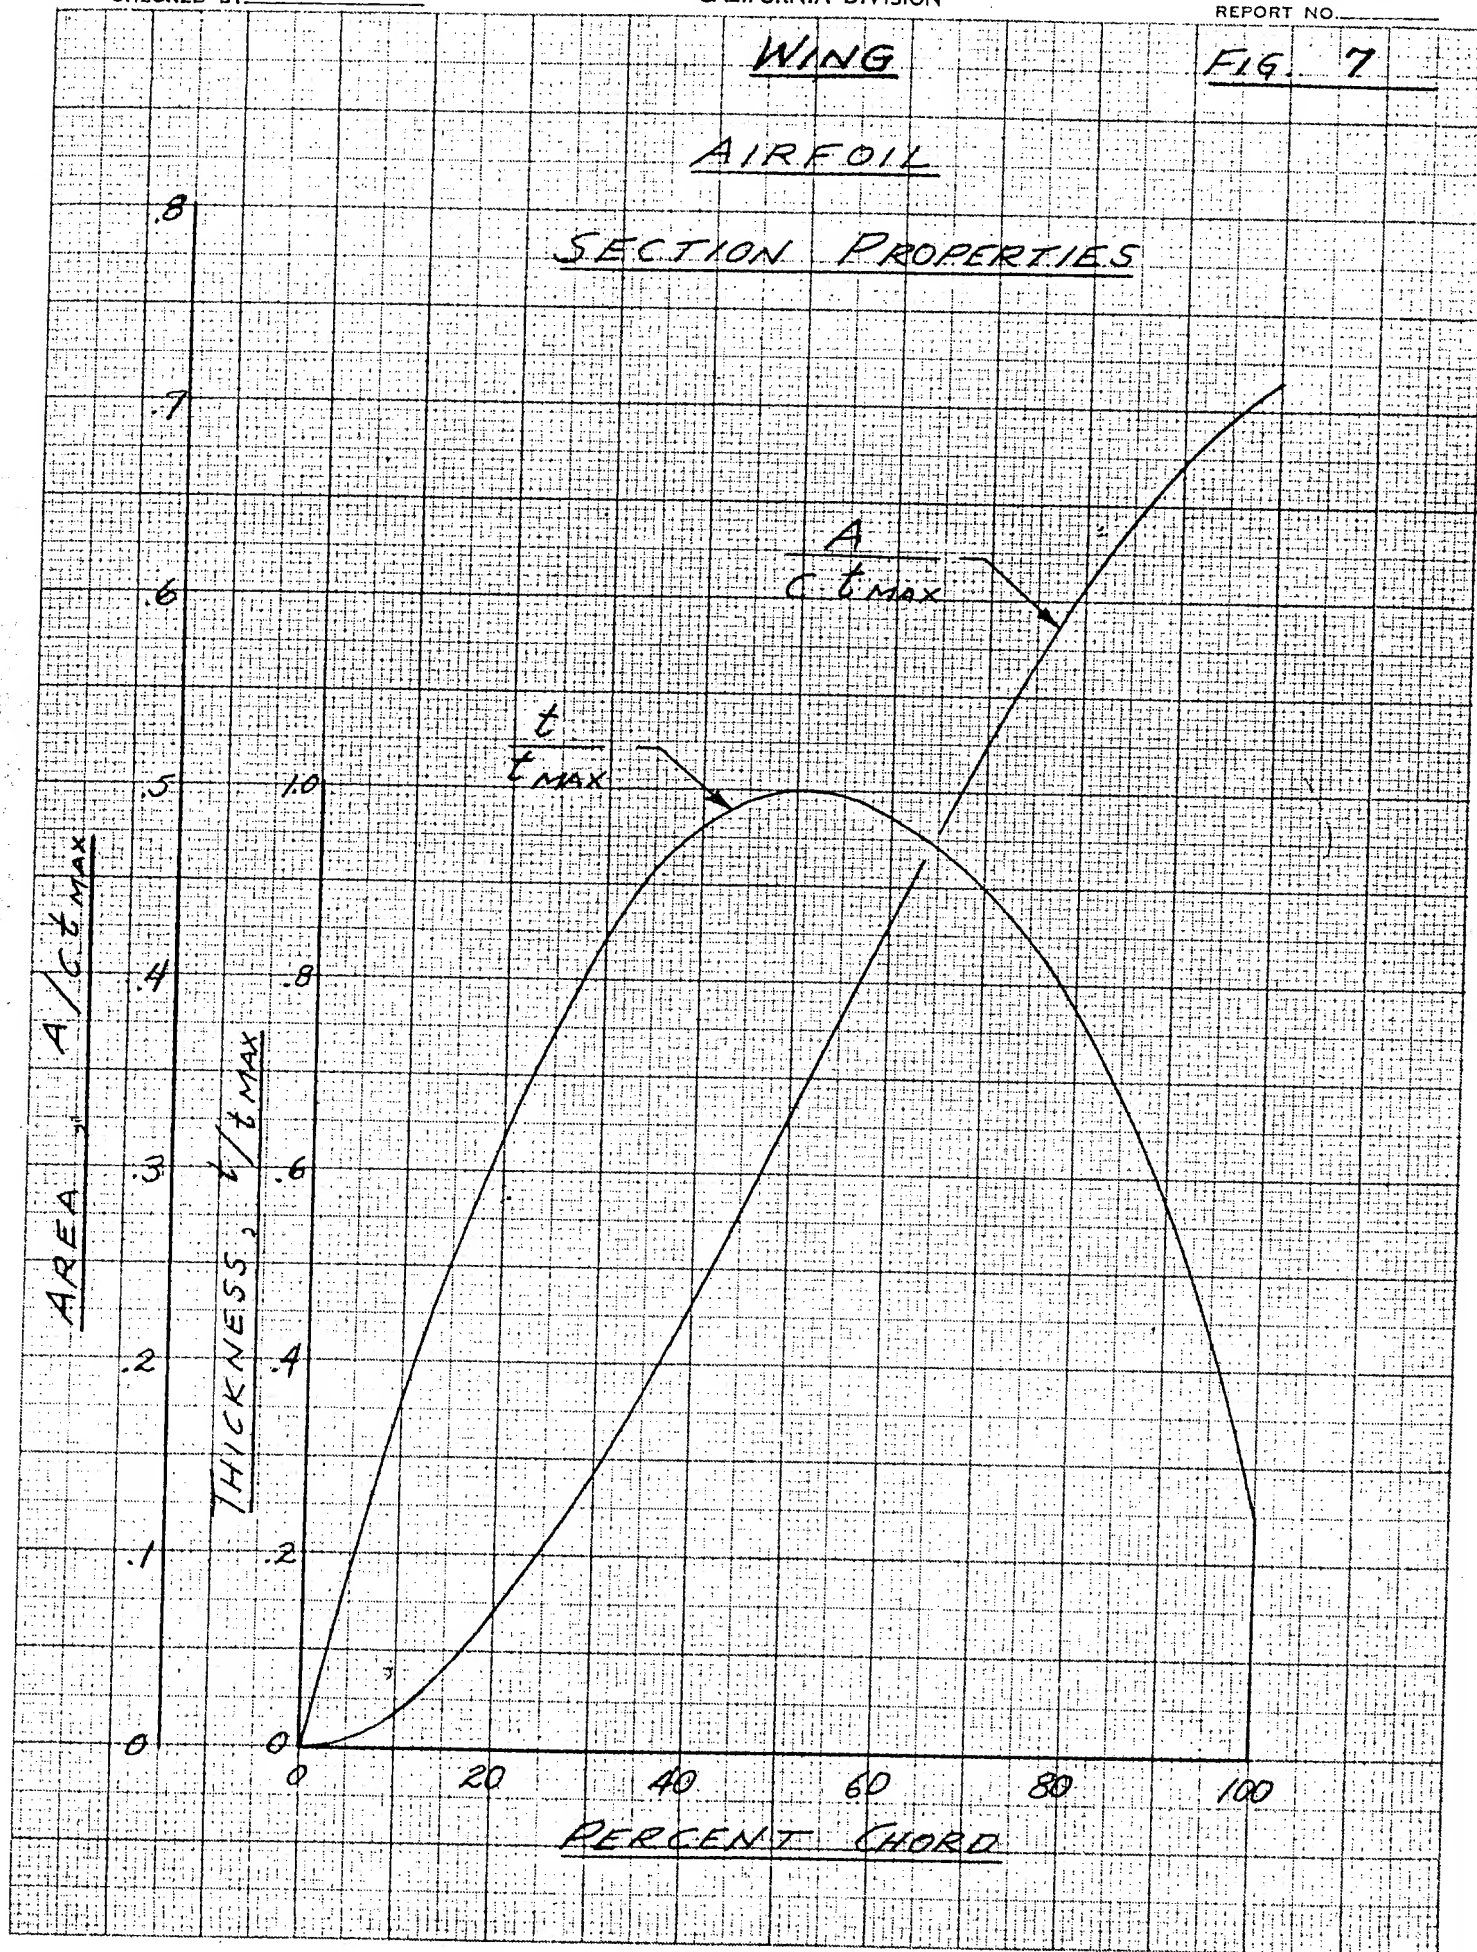

PREPARED BY _____
 DATE _____
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION
 CALIFORNIA DIVISION

PAGE IV-21
 MODEL A-11
 REPORT NO. _____


FIG 8

WING

STRUCTURAL

SECTION PROPERTIES

Box ~ .15 TO .80 C

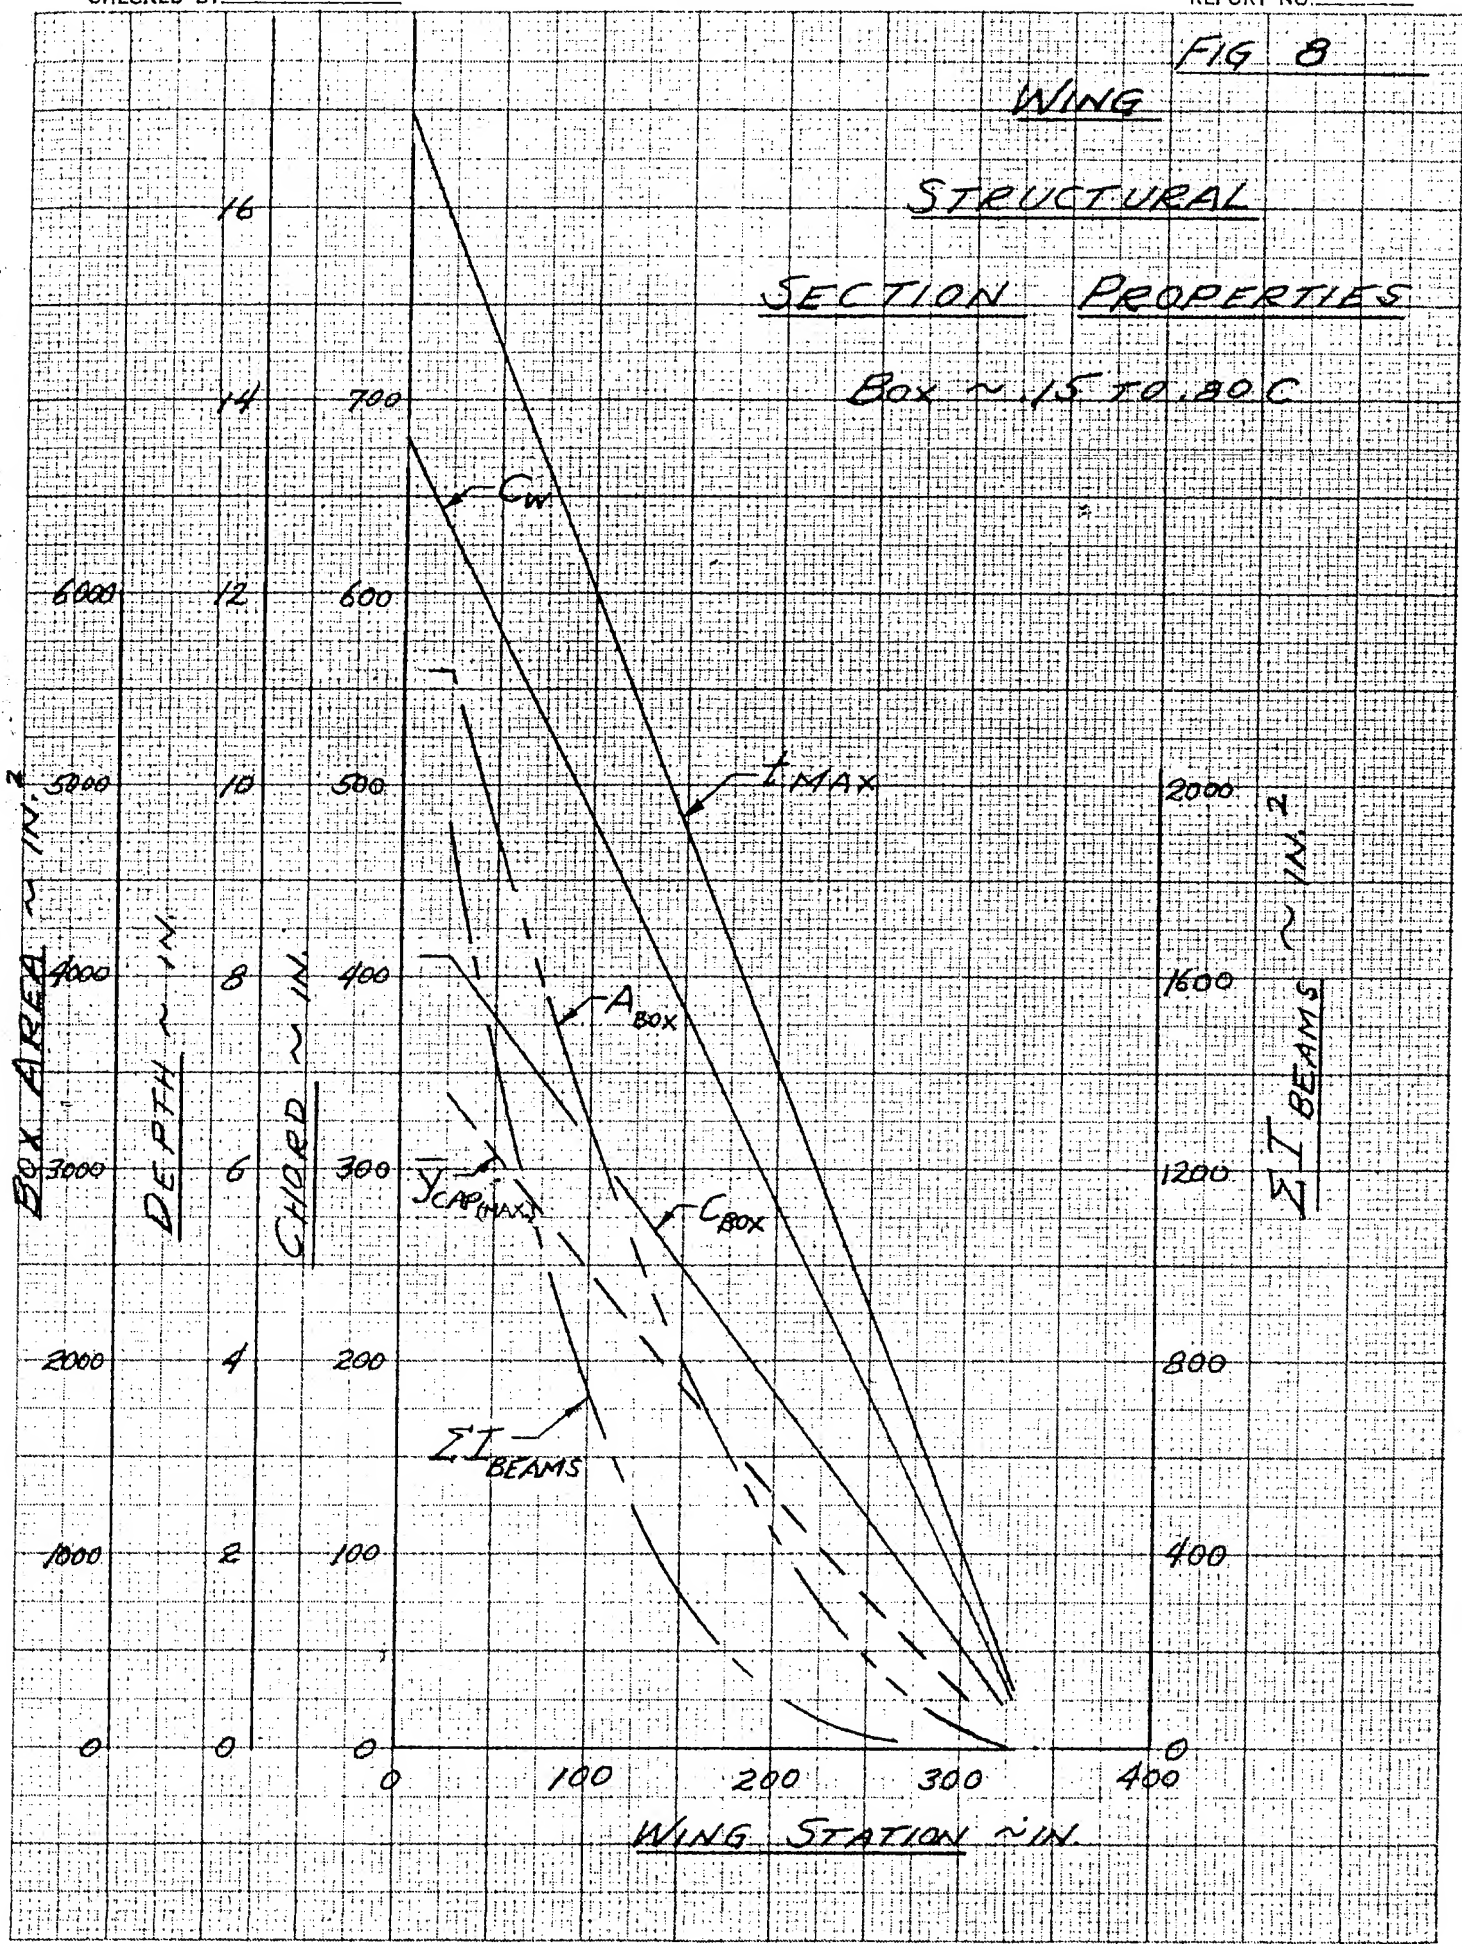

WING STATION ~ IN

REPRODUCED FROM
 LOCKHEED AIRCRAFT CORPORATION
 CALIFORNIA DIVISION

Lockheed AIRCRAFT CORPORATION

CALIFORNIA DIVISION

WING (Continued)Internal Loads and Analysis

The internal loads are calculated from the critical external loads given in Figure 6 for the subsonic room temperature condition by means of the structural section properties given in Figure 8.

The beam cap design loads, stresses and cross section areas are summarized in Figure 9. The axial load shown is for the highest loaded beam. All beams are similar in cross sections and as noted in the figure have a constant area for most of their span. This makes for ease of fabrication and is efficient because tapering of material is accomplished by the number of beams decreasing with span station. Beam caps are machined from B-120VCA titanium rolled bar.

Beam web design shear flows, stresses and web gages are summarized in Figure 10. Due to the effects of beam taper, the vertical shear in the beam webs is very low and a minimum gage of .016 sheet is sufficient. Material is B-120VCA titanium cold rolled sheet. Stiffeners are sheet metal angles of the same material spaced at approximately three inches along the beams. Front and rear closing spars are of similar construction but web gage is .040 in order to maintain the torque box stiffness.

Wing upper and lower surfaces are designed by the torsion shear flows given in Figure 11, plus the effects of bending due to air loads and, in the case of the wing fuel tank region, fuel vapor pressure. The outer skin is

Lockheed AIRCRAFT CORPORATION

CALIFORNIA DIVISION


WING (Continued)Internal Loads and Analysis (Continued)

.020 B-120VCA titanium cold rolled sheet and the inner skin is .025 B-120VCA titanium sheet which is formed in the annealed state and then heat treated. The depth of the corrugation varies according to the shear stability and pressure load bending requirements along the span.

The wing torsional stiffness for aileron effectiveness is presented in Figure 12.

FIG. 9

WING BEAM CAP DESIGN

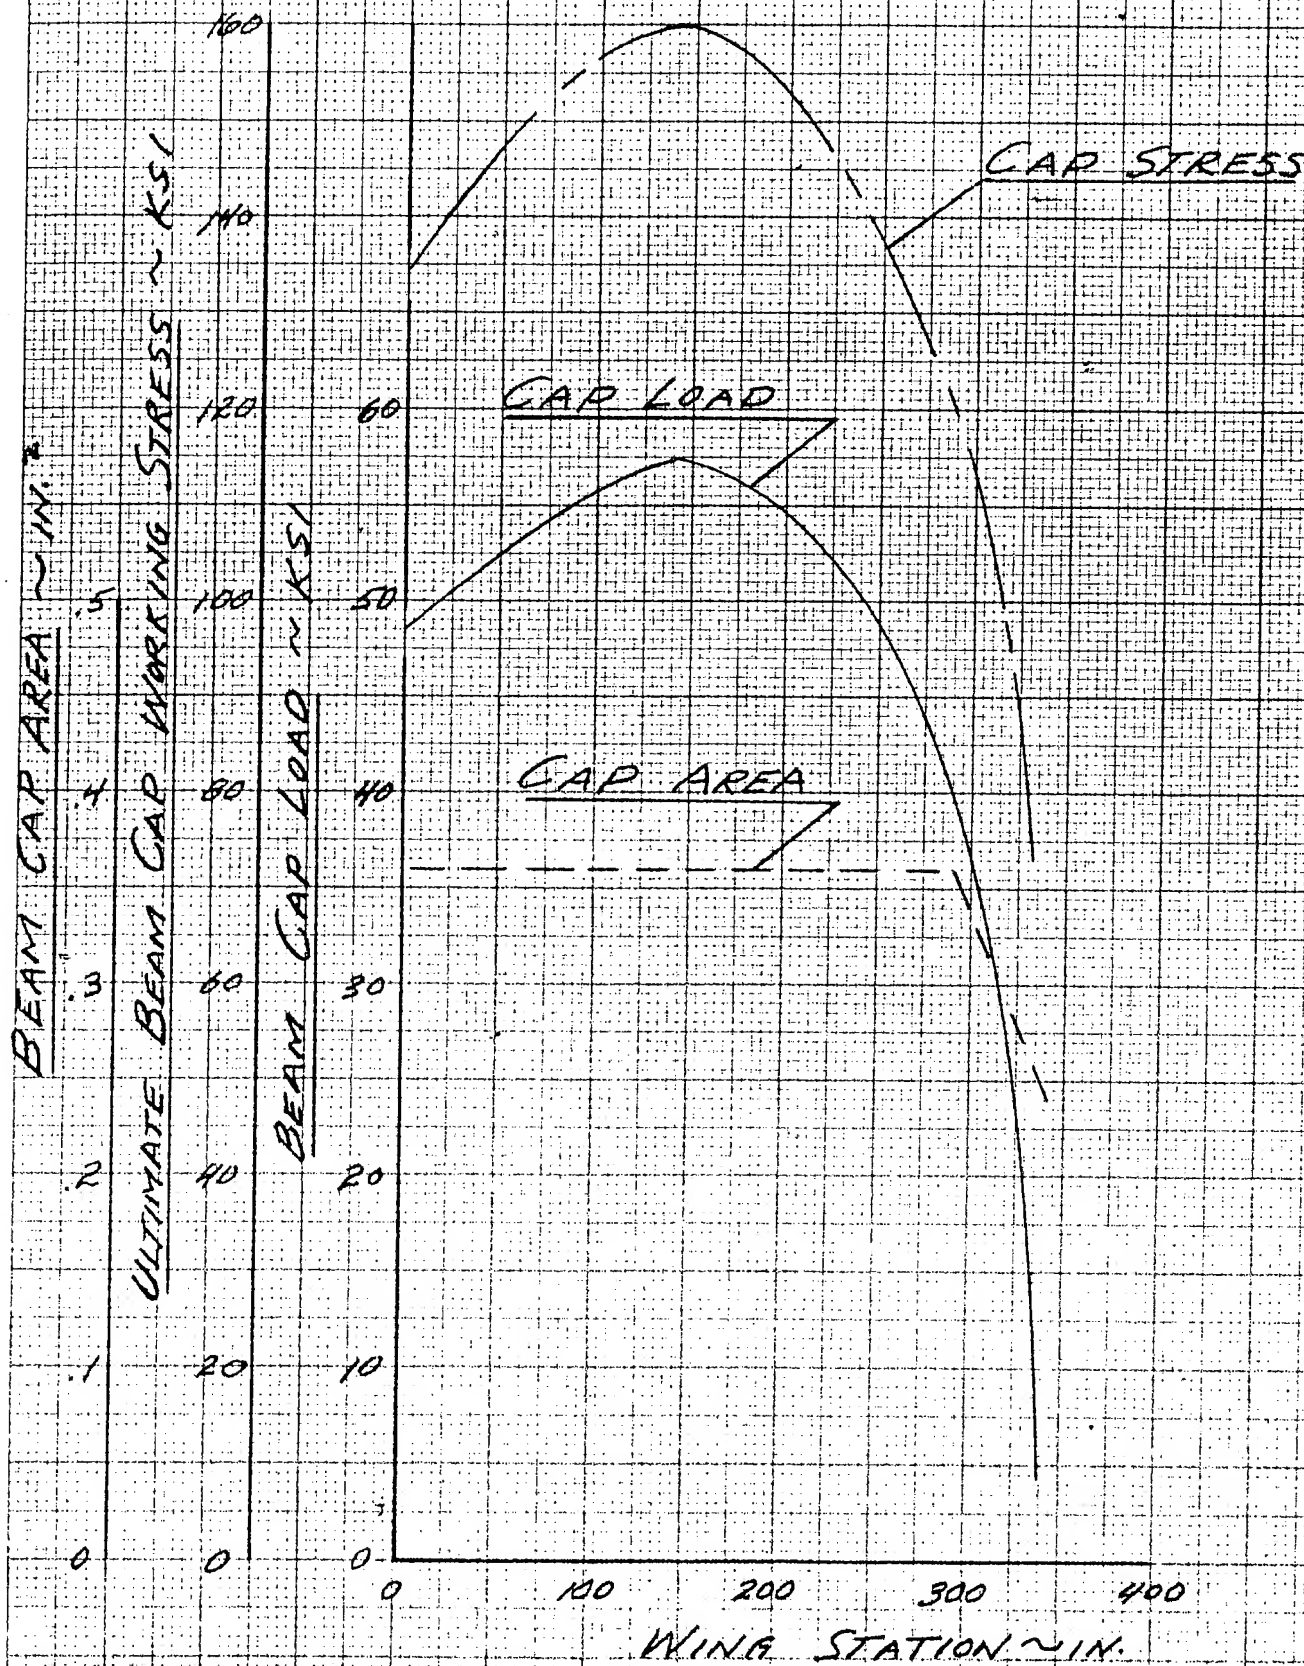

DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION
CALIFORNIA DIVISION

PAGE _____
MODEL A-11
REPORT NO. _____

FIG. 10

WING BEAM WEB DESIGN



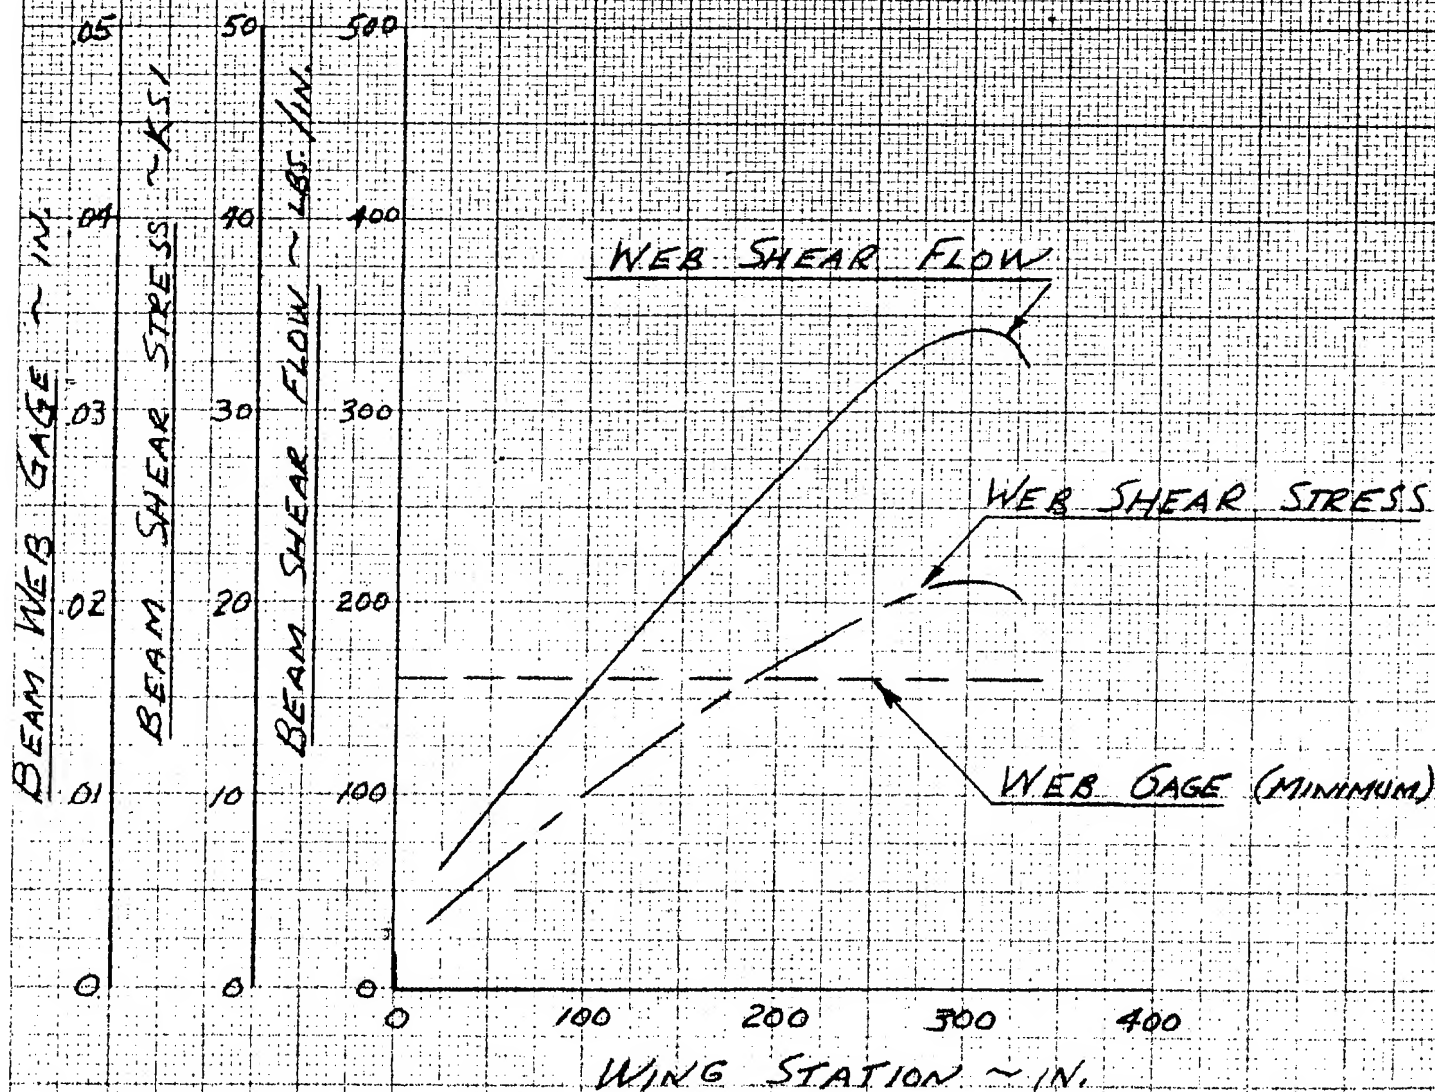


FIG. 11

WING SURFACE DESIGN

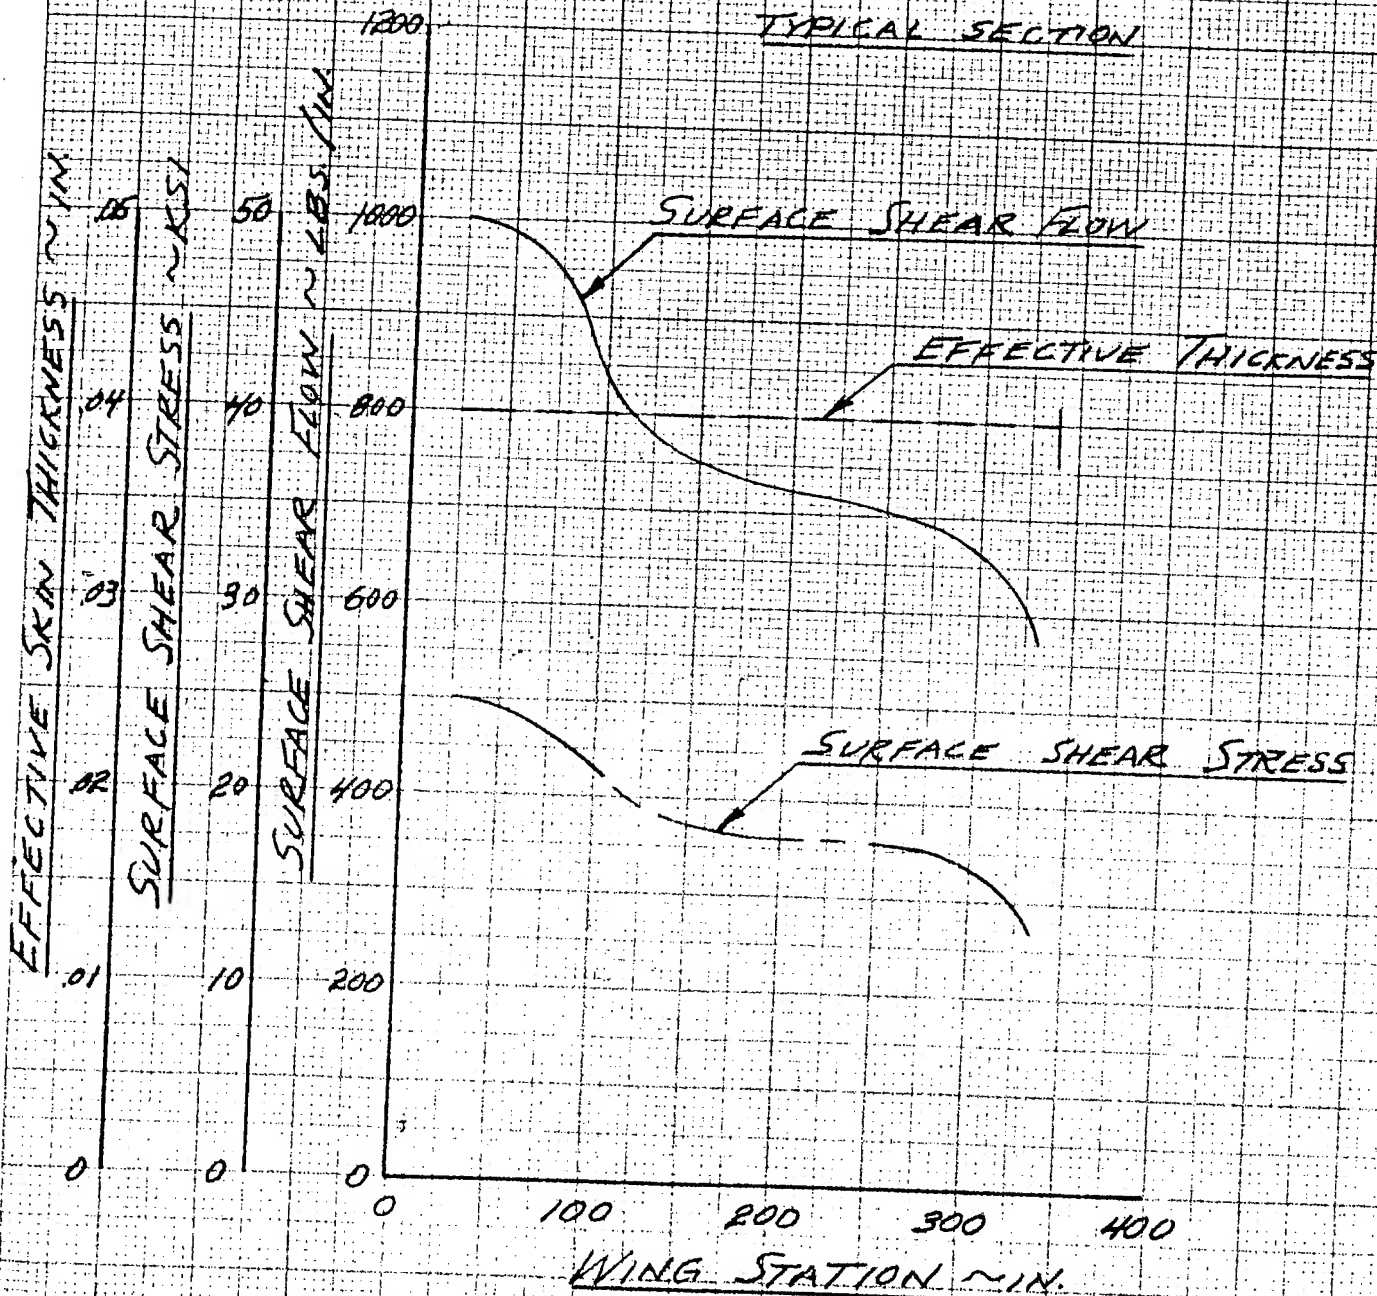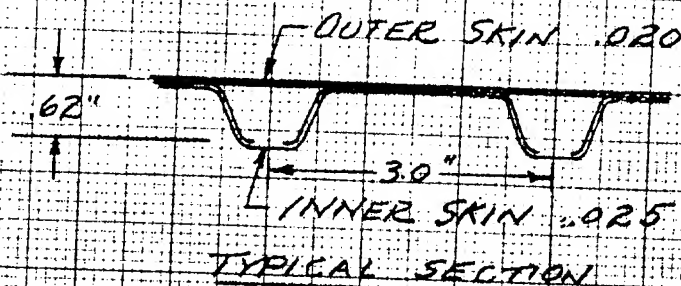


DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION
CALIFORNIA DIVISION

PAGE 1 14-61
MODEL A-11
REPORT NO. _____

FIG. 12

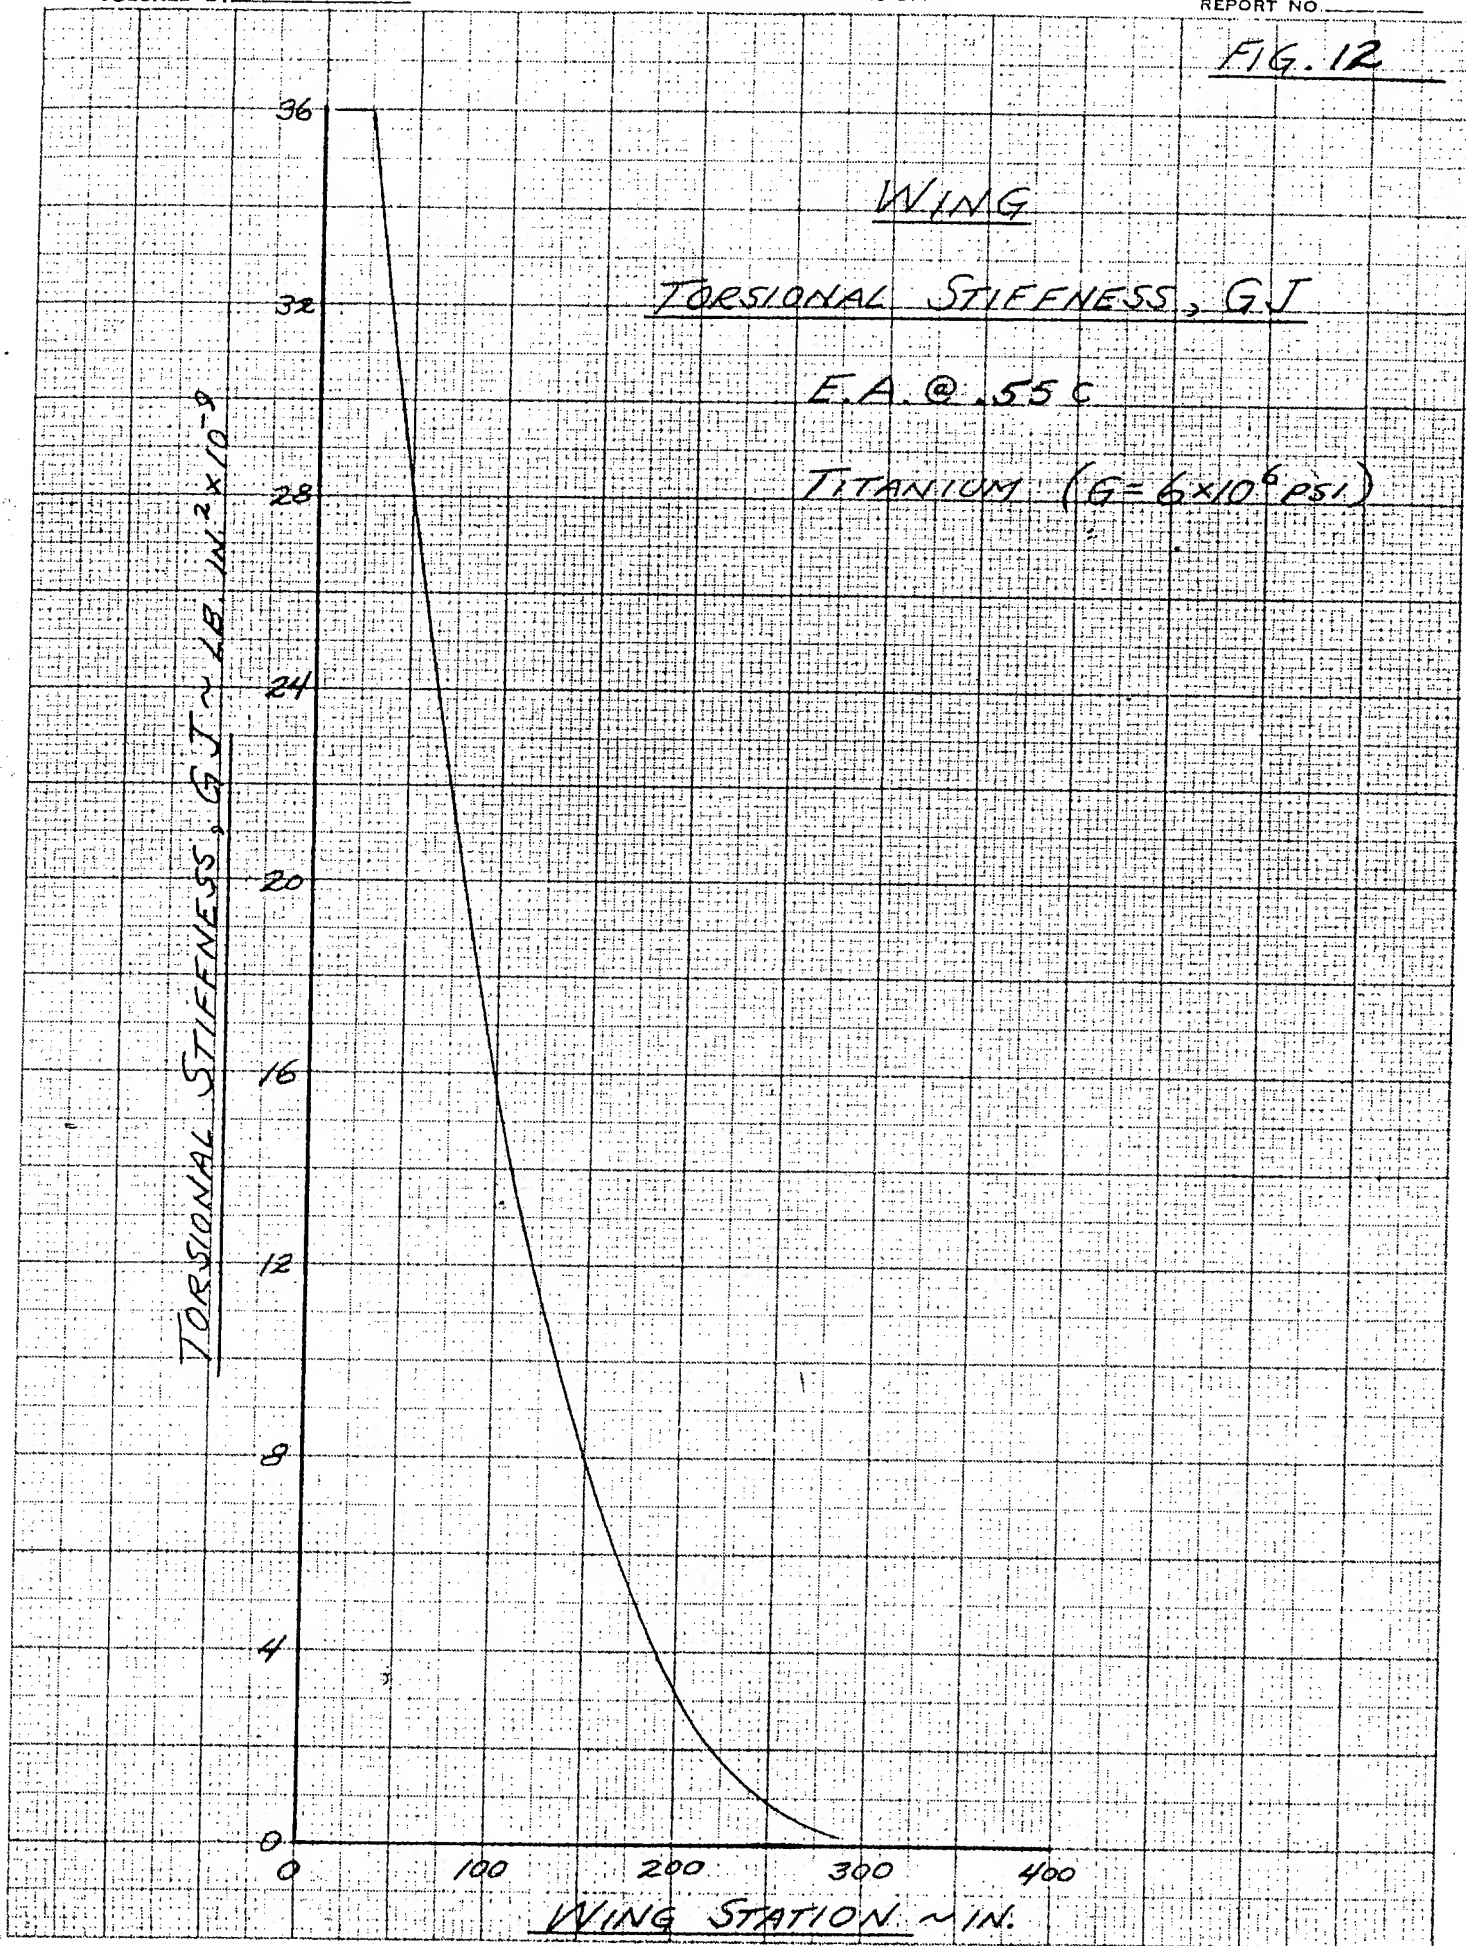

Lockheed AIRCRAFT CORPORATION

CALIFORNIA DIVISION

FUSELAGEDescription

The fuselage consists of three major assemblies; the forward, mid and aft sections as noted on the Inboard Profile. The construction of the fuselage in three sections will greatly facilitate fabrication of the structure and installation of the functional equipment required in each section. The provision of service joints on these fuselage sections permits rapid disassembly of the aircraft for transporting purposes.

The forward fuselage section contains the Flight Station, Military Equipment compartment, nose landing gear, air conditioning compartment and suitable compartments for the installation of electronic, navigation and communication equipment. The remainder of the forward section contains the forward fuel tanks.

The mid fuselage section provides for attachment of the wing box section and contains the main landing gear and mid section fuel tanks.

The aft fuselage section provides for attachment of the aft portion of the fin box section and contains the aft section fuel tanks and the landing chute.

The fuselage fuel tanks are of the integral type providing maximum fuel capacity for a minimum size structure.

Lockheed AIRCRAFT CORPORATION

CALIFORNIA DIVISION

FUSELAGE (Continued)Description (Continued)

The fuselage structure is of semi-monocoque construction, consisting of skin, rings and four longerons. Since most of the fuselage structure adjacent to the skin is subjected to high temperatures for long periods of time, the material used is a titanium alloy (B-120VCA). For internal structure, where temperature is maximum at 300°F, 2024T6 or 2024T81 aluminum alloys will be used. The minimum skin gage is .016 at the nose, increasing to a maximum of .040 at the center section. Rings will be of gage comparable to the skin except the main frames in the center section. Rings (2.0 in. deep channel sections) will be spaced approximately 15.0 in. c.c., with two (1.0 in. deep) H section intermediate rings spaced between, giving a panel spacing of 5.0 c.c. Four longerons, B.L. 14.0, left and right, resist up and down bending moments. Side bending is resisted by tension in the side skin and B.L. 14.0 upper and lower longerons on the opposite side. Longerons will be formed sheet metal channels, with inner and outer caps tying the channels together. The outer cap also acts as a splice plate for the skin and rings, and the inner cap as a splice plate for the inner flange of the 2.0 in. deep rings. Spot welding will be used extensively because of weight, low cost, reliability and strength.

The fuselage shell will be made in four parts, spliced longitudinally at the longeron points. This "quarter shell" breakdown permits spotwelding

Lockheed AIRCRAFT CORPORATION

CALIFORNIA DIVISION

FUSELAGE (Continued)Description (Continued)

to be used extensively. The "quarter shells" will be spliced together by a maximum of two longitudinal rows of titanium (B-120VCA) rivets at each of the four longerons.

Figure 13 is a shear and moment curve, for the forward fuselage, critical for room temperature condition. The shear and moments for elevated temperature conditions are almost as critical. Figure 14 shows the longeron loads, areas, stresses, skin shear flows and skin thicknesses required. A detailed sketch, Figure 15, of typical lower longeron is shown. The upper longeron is similar but approximately half of the area of the lower longeron at any given fuselage station. Also a sketch, Figure 16, showing typical side shell construction and ring splice at longerons, is included.

The cockpit section is similar to the basic shell except that the upper longerons support the canopy and cockpit pressure loads. Pressure bulkheads in this area and other internal structure will be considered to be made of 2024ST aluminum alloy if temperatures are below 300°F.

Fuselage skin is also considered to carry internal pressure of 15.0 psi ult. due to fuel pressure in the fuselage fuel tank region. Surge bulkheads, where temperatures remain below 300°F will be made of 2024ST aluminum alloy.

PREPARED BY _____
 DATE _____
 CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION
 CALIFORNIA DIVISION

PAGE IV-31
 MODEL A-11
 REPORT NO. _____

FIG. 13

FUSELAGE FOREBODY LOADS
 ULTIMATE


COND. FULL FUSELAGE FUEL
 2.5 g. LIMIT LOAD FACTOR
 ROOM TEMPERATURE

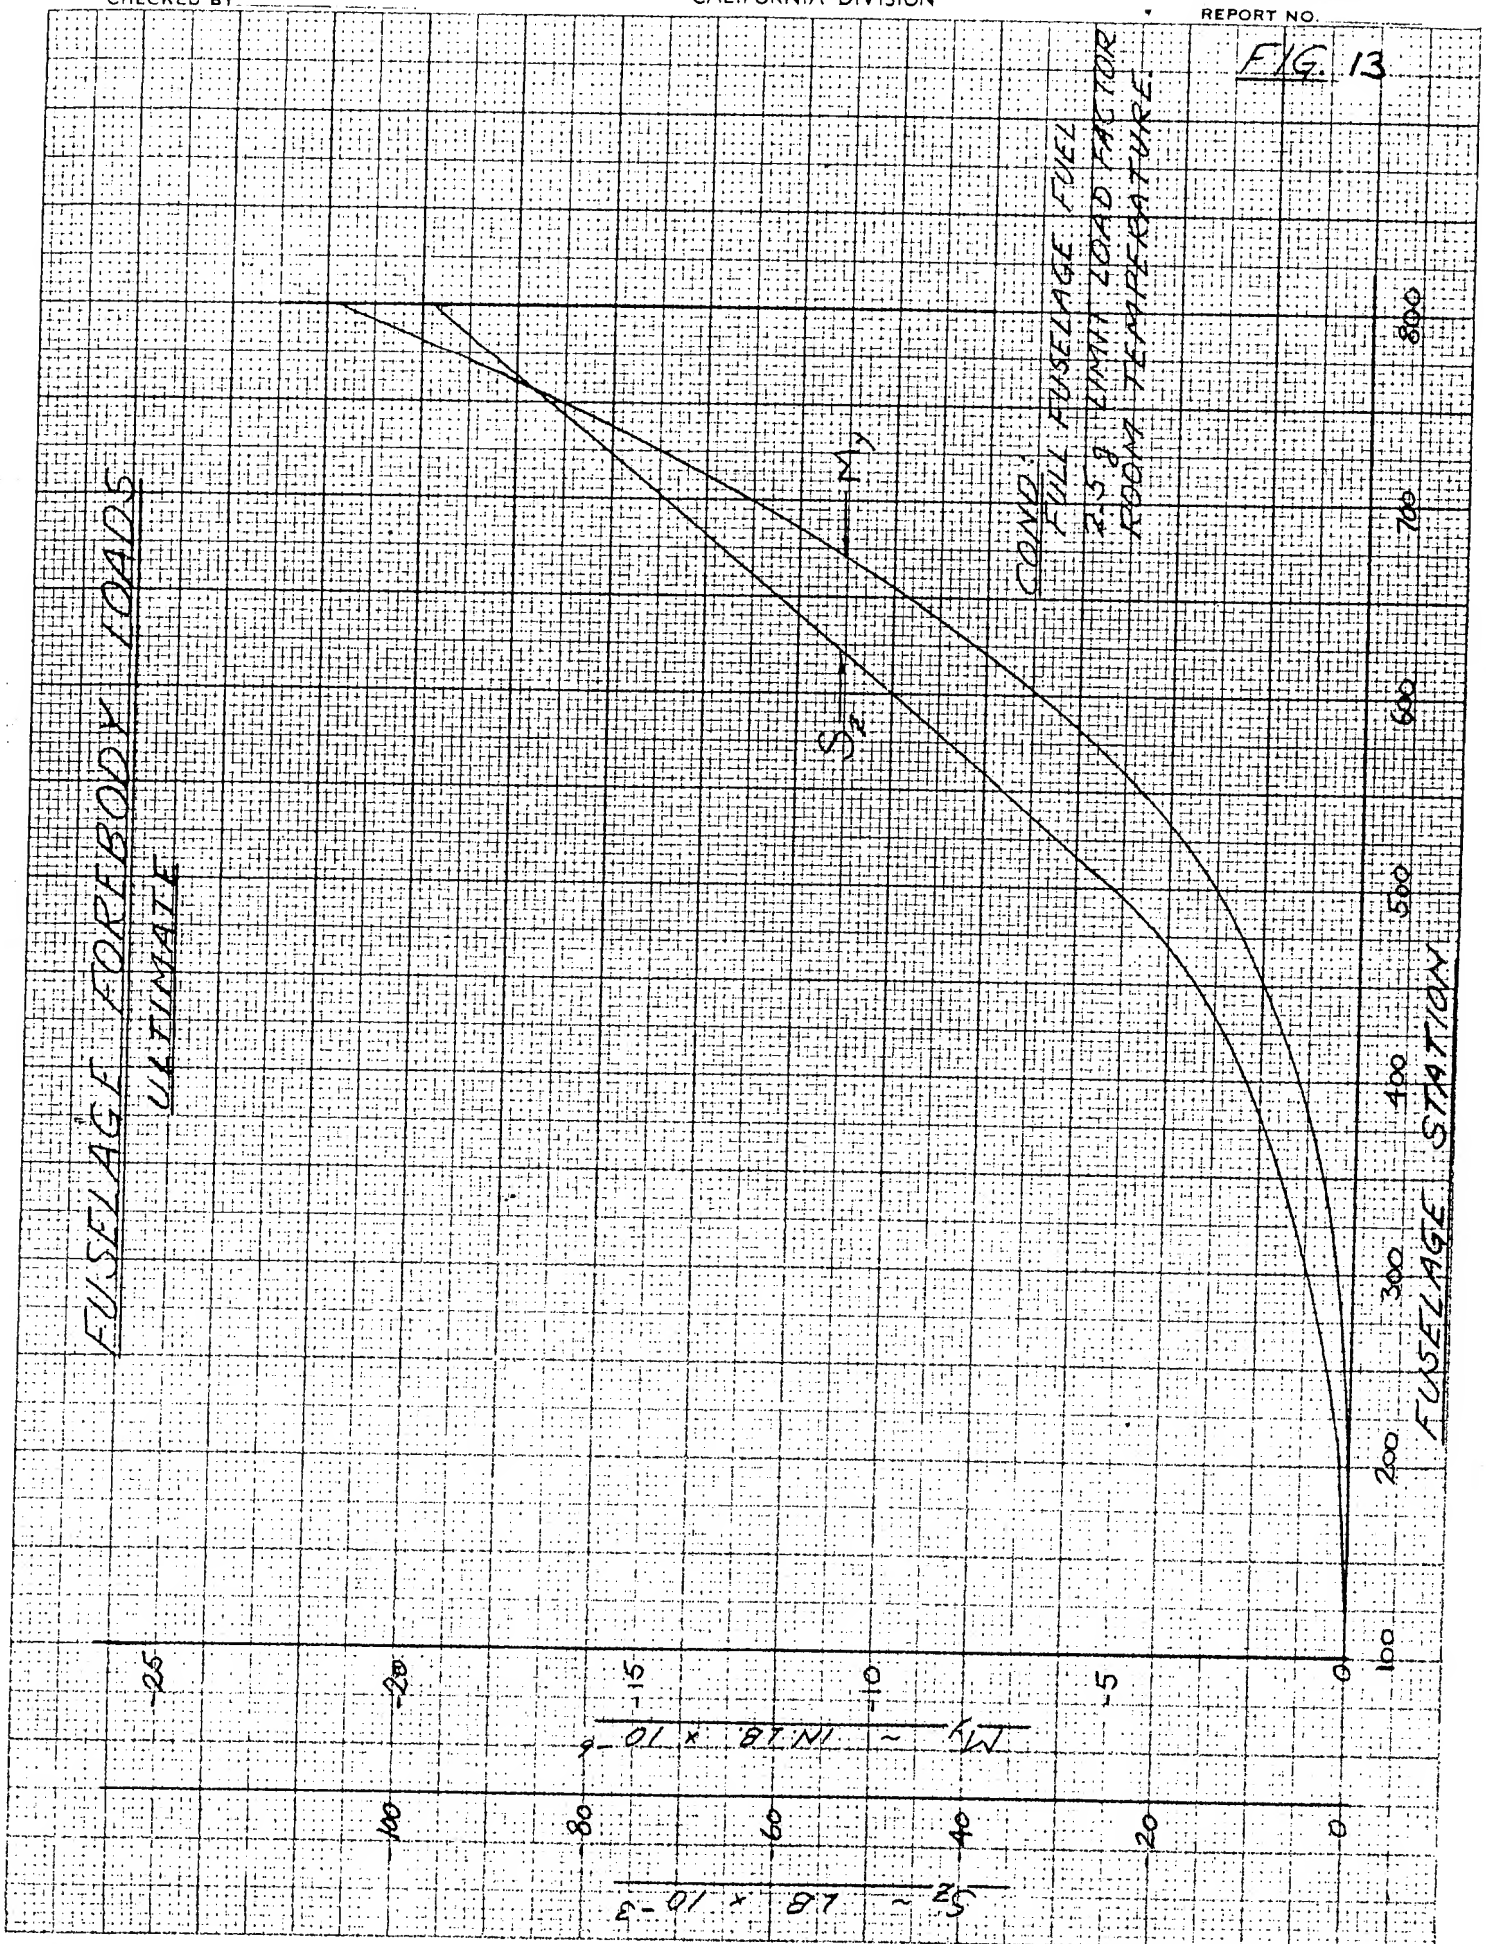

Prepared	NAME	DATE	LOCKHEED AIRCRAFT CORP.	TEMP.	PERM.
Checked				Page	IV-32
Approved				Model	A-11
			TITLE	Report No.	

BASIC FOREBODY STRUCTURE

FIG. 14

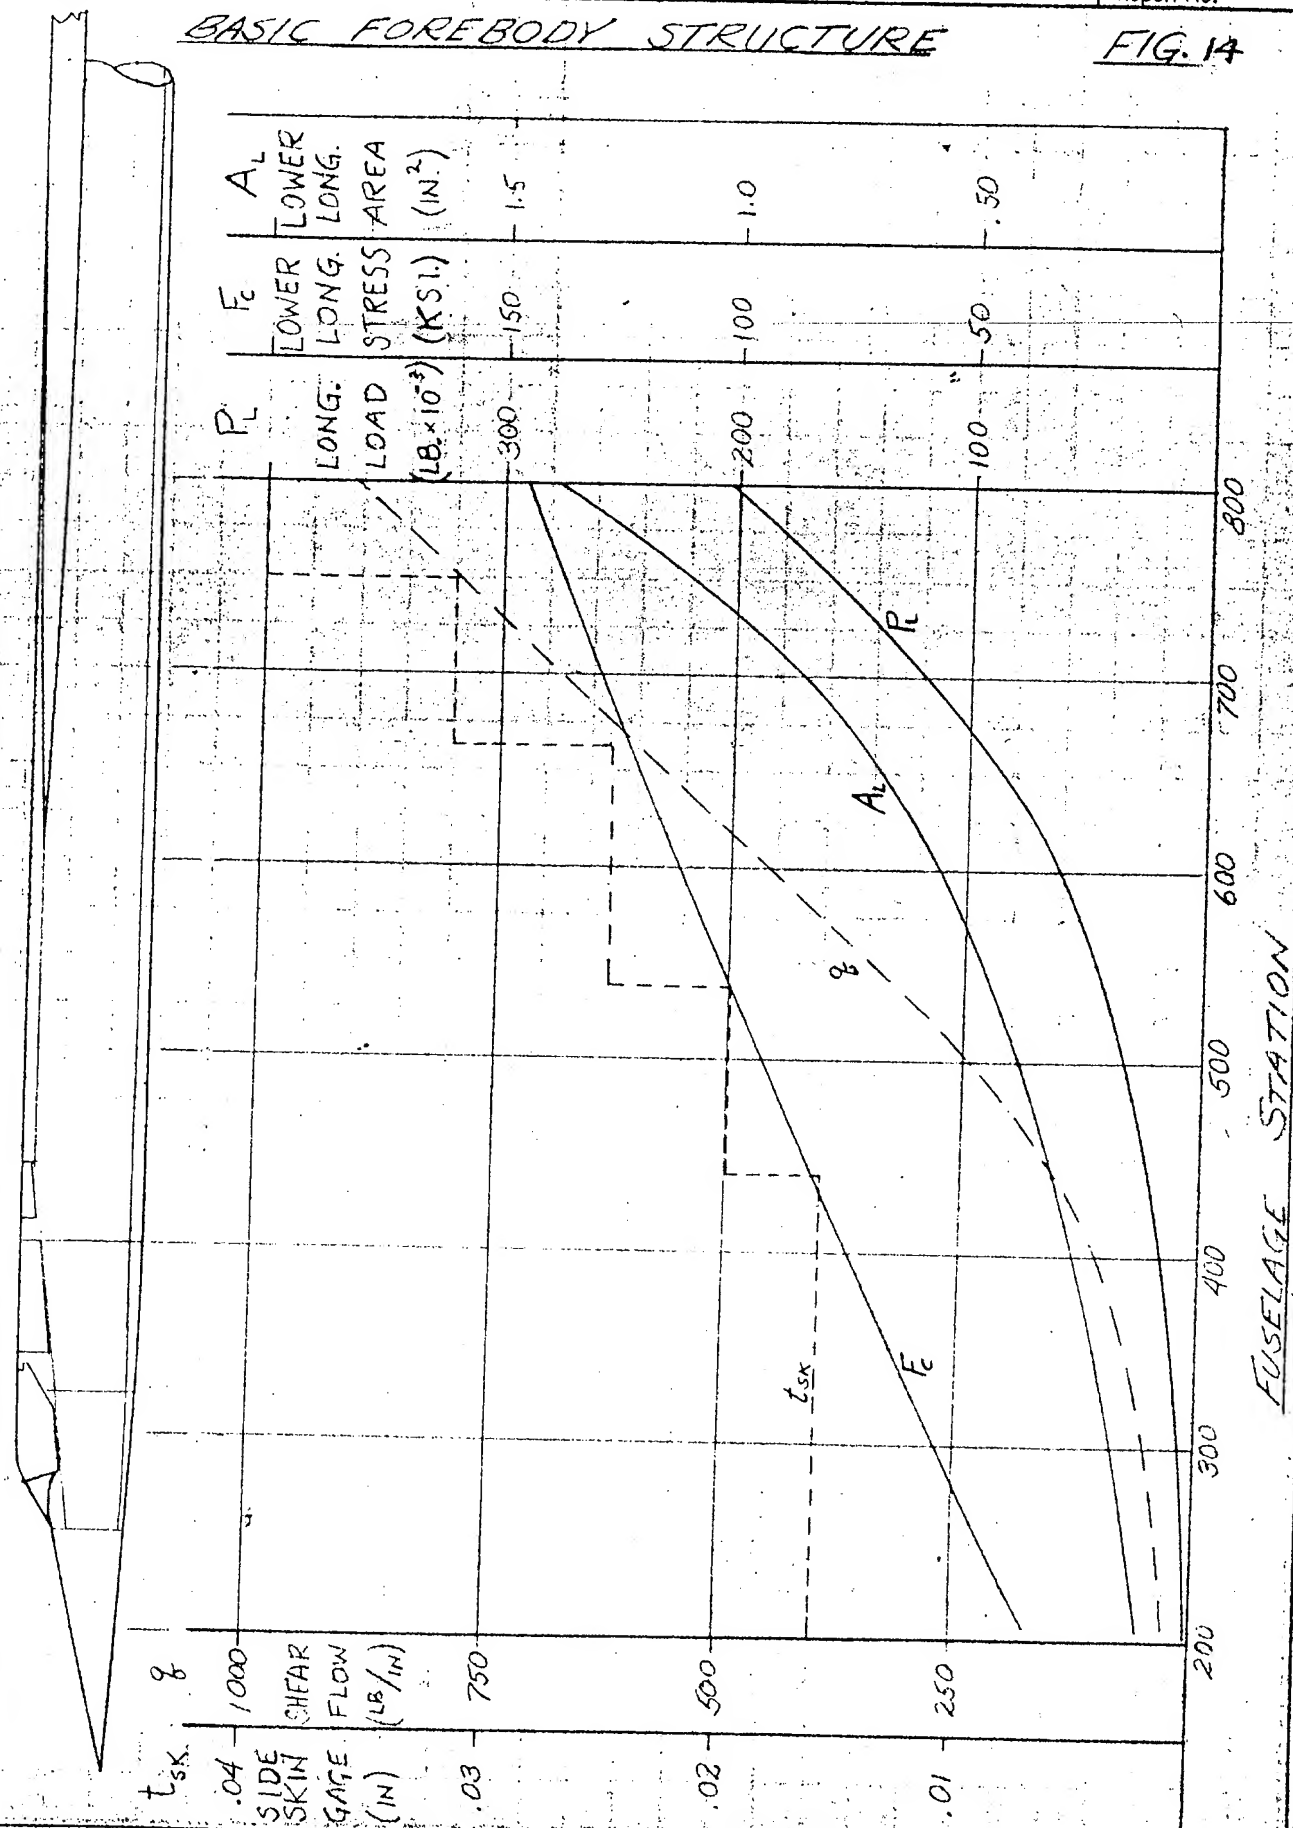

Prepared	NAME	DATE	LOCKHEED AIRCRAFT CORP.	Page	TEMP.	PERM.	
Checked				TITLE	Model	A-11	IV-33
Approved					Report No.		

FIG. 15

TYPICAL LOWER LONGERON SECTIONS


F.S. 600

MAT'L: B 120 VCA TITANIUM
 SKIN: .032, 200,000 PSI F_u @ R.T.
 REMAINDER:
 .050, 200,000 PSI F_u @ R.T.

COMPRESSION

ALLOWABLES:

$E = 110,000$ PSI
 $A_{eff} = .54$ IN.²
 $P_{all} = 59,400$ LB.

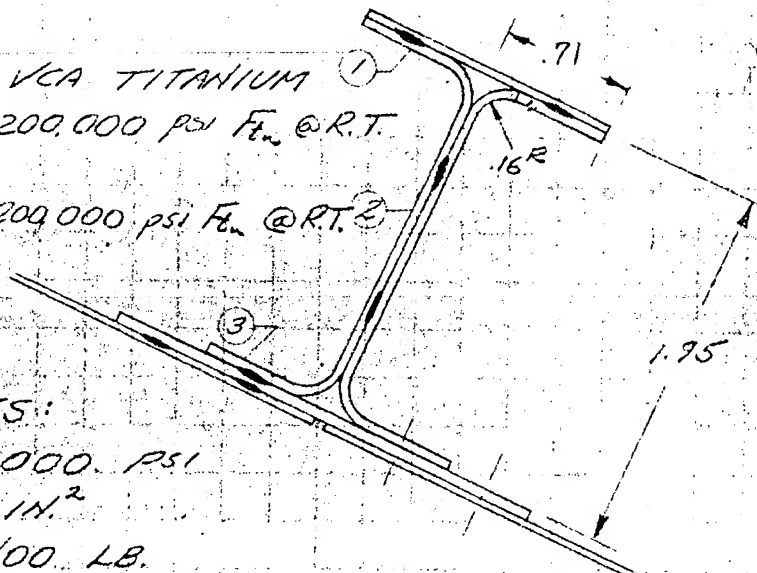

F.S. 300


MAT'L: B 120 VCA TITANIUM
 200,000 PSI F_u @ ROOM TEMP

THICKNESSES:

CHANNELS ~ .063
 TOP STRAP ~ .15
 SIDE STRAPS ~ .20
 SPLICE ~ .063
 SKIN ~ .032



EFFECTIVE AREA:
 1.40 IN.²

$F_c = 145,000$ PSI
 $P_{all} = 203,000$ LB.

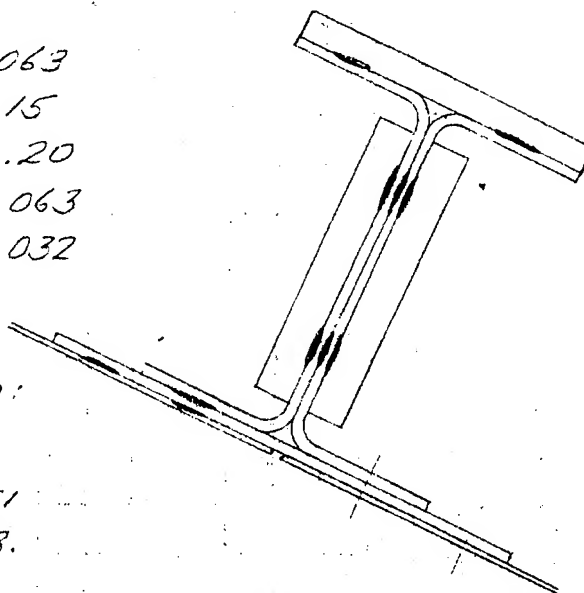

Prepared	NAME	DATE	LOCKHEED AIRCRAFT CORP.	Page	TEMP. IV	PERM. 34
Checked				Model A-11		
Approved					Report No.	

TYPICAL SIDE SHELL

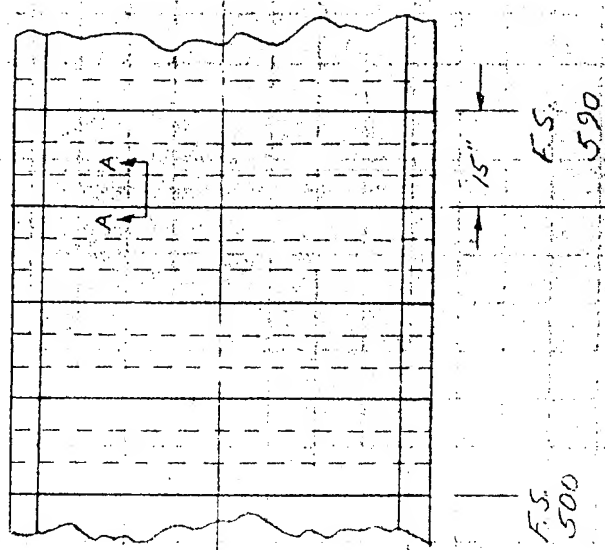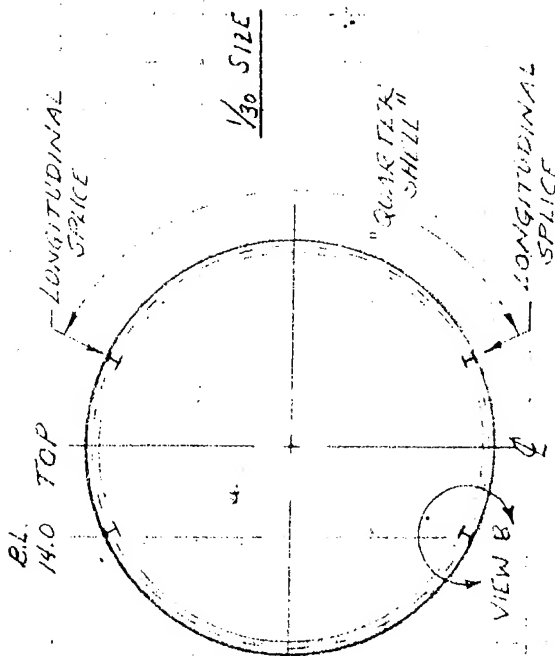

INNER CAP ROUTED BACK TO THESE POINTS BETWEEN FRAMES

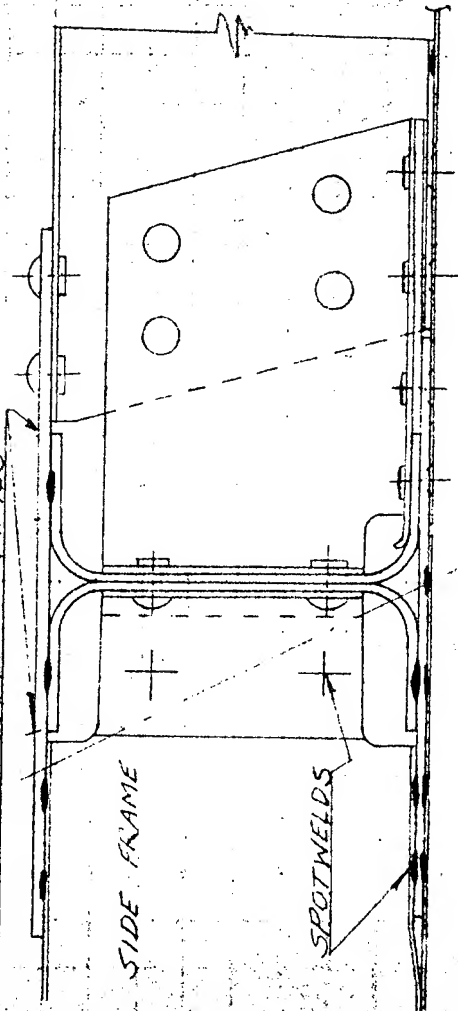


FIG. 16

2" DEEP FRAMES SPACED AT 15.0" WITH 1" DEEP INTER-MEDIATE FRAMES AT 5.0" SPACING

SEC. 1A

VIEW "B" (ROTATED 26°)

FULL SIZE

Lockheed AIRCRAFT CORPORATION

CALIFORNIA DIVISION

LANDING GEAR

The landing gear is of the conventional tricycle configuration with both main and nose gears retracting forward.

Static MG hub is at Sta. 915, WL 29.6. Static NG hub is at Sta. 477.5, WL 24.2.

The main gear stroke is 18½ in. and NG stroke is 15 in. With the ratio of 85,000 lbs. takeoff weight to 40,000 lbs. landing weight, and by virtue of the lengthy MG stroke, gear strength capabilities are determined mainly by ground handling conditions, (taxi, braking, and tow).

$$n_g \text{ (for landing)} = \frac{\left(\frac{V^2}{2g}\right)}{n_{\text{STRUT}}}$$

Assuming 7 ft./sec. sink speed and $n_{\text{strut}} = .9$,

$$n_g = \frac{49}{2 \times 32.2 \times .9} = .84$$

and for the ground conditions, static loads, with CG at 25% MAC (Sta. 868) =

$$P_{V_{G_M}} = \frac{85,000}{2} \left(\frac{390.5}{437.5} \right) = 38,000 \text{ lbs.}$$

$$P_{V_{G_N}} = 85,000 - 76,000 = 9,000 \text{ lbs.}$$

The main gear tires are 40 x 12 of 26 ply rating. Nose gear tire is 26 x 6.6 EHP, Type VII.

Lockheed AIRCRAFT CORPORATIONCALIFORNIA DIVISION

COCKPIT ENVIRONMENT

The general arrangement of the cockpit, windshield and canopy is as shown in Figure 1.

This is the simplest and lightest configuration which we believe adequate to provide the required comfort and safety for the pilot in the flight regime which this airplane will encounter.

In this section the problems of air conditioning, emergency escape and personal equipment are given separate consideration.